



TEXTURE



GRID




FRAME




Attention: frame only for straight sides.

STANDARD COLOURS

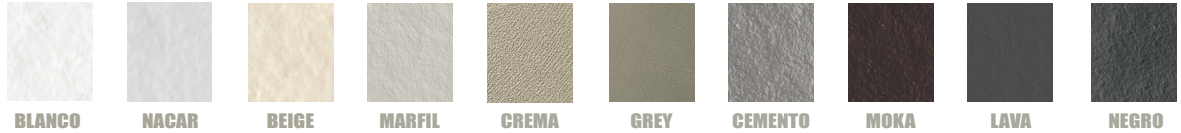

NATURALLY MADE COLOURS

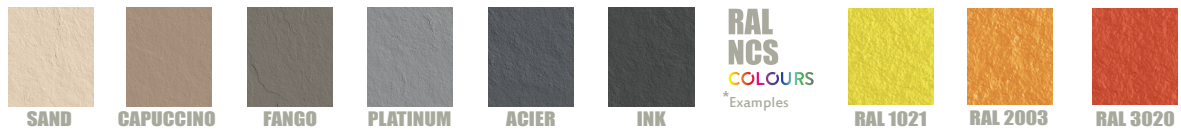

SIZES

Attention: Maximun sizes might vary $\pm 1\%$

	A (cm)	B (cm)	C (cm)
	100	70/80/90/100	25
	120	70/80/90/100	25
	140	70/80/90/100	55
	160	70/80/90/100	55
	180	70/80/90/100	55
	200	70/80/90/100	55

	A (cm)	B (cm)	C (cm)
	90	90	45
	100	100	50

WASTE VALVE

Attention: consult for other models

WASTE VALVE	EVACUATION	WASTE VALVE	EVACUATION
 ✓ STANDARD WASTE VALVE	38,4 l/min	 VERTICAL WASTE VALVE	25,8 l/min
 SLIM WASTE VALVE WITH HORIZONTAL OUTPUT	30,0 l/min	 HIGH FLOW WASTE VALVE WITH HORIZONTAL OUTPUT	51,0 l/min

TECHNICAL SPECIFICATIONS



Possibility of custom cutting.



Hydrolisis resistant. Orthophtalic polyester free.



Resistant to thermal shock.
Class 1 EN UNE-EN 14527:2006 + A1:2010.



Safe cut. Material without silica.



Impact resistant.



Coloured mass.

TEST

	UNE-ENV 12633:2003 Annex A	DIN 51097:1992	French Normative XP P 05-010
	CLASS 3	Slip resistance CLASS C	PN 24

✓ Included



Material: AKRON (Composite in polyurethane base with mineral fillers).

Optional



Installation: basic, floor level or raised. Consult the installation manual included in the packaging.