



TEXTURE




GRID



STANDARD COLOURS




NATURALLY MADE COLOURS

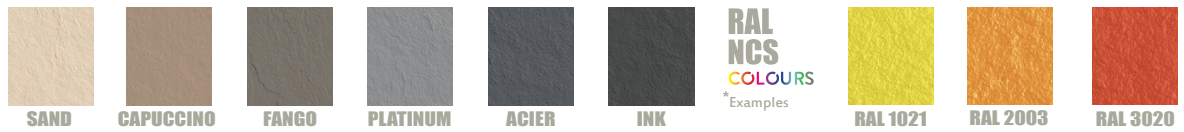

SIZES

Attention: Maximun sizes might vary $\pm 1\%$



A (cm)	B (cm)	C (cm)	D (cm)
100	70/75/80/90/100	9,5	20
120	70/75/80/90/100	9,5	20
140	70/75/80/90/100	9,5	20
160	70/75/80/90/100	9,5	20
180	70/75/80/90/100	9,5	20
200	70/75/80/90/100	9,5	20

WASTE VALVE

Attention: consult for other models

WASTE VALVE	EVACUATION	WASTE VALVE	EVACUATION
<p>✓ STANDARD WASTE VALVE</p>	31,8 l/min	<p>VERTICAL WASTE VALVE</p>	25,8 l/min

TECHNICAL SPECIFICATIONS



Possibility of custom cutting.



Hydrolisis resistant. Orthophtalic polyester free.



Resistant to thermal shock.
Class 1 EN UNE-EN 14527:2006 + A1:2010.



Safe cut. Material without silica.



Impact resistant.



Coloured mass.

TEST

	UNE-ENV 12633:2003 Annex A	DIN 51097:1992	French Normative XP P 05-010
CLASS 3	Slip resistance CLASS C		PN 24

✓ Included



Material: AKRON (Composite in polyurethane base with mineral fillers).

Optional



Installation: basic, floor level or raised. Consult the installation manual included in the packaging.