



TEXTURE




GRID



STANDARD COLOURS

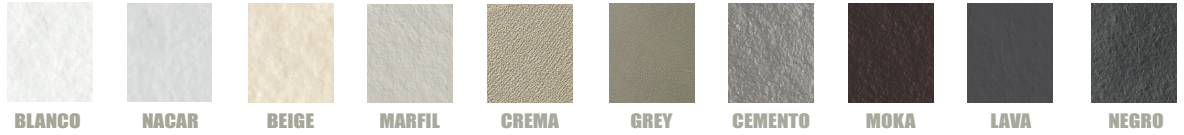


NATURALLY MADE COLOURS

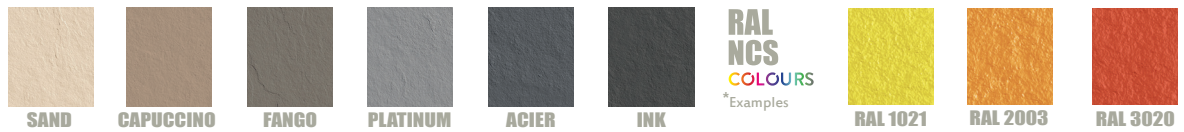

SIZES

Attention: Maximun sizes might vary ± 1%



A (cm)	B (cm)	C (cm)	D (cm)
100	75/80/85/90	12	5
120	75/80/85/90	12	20
140	75/80/85/90	12	25
160	75/80/85/90	12	25
190	75/80/85/90	12	35

WASTE VALVE

Attention: consult for other models

WASTE VALVE	EVACUATION	WASTE VALVE	EVACUATION
<p>✓ STANDARD WASTE VALVE</p>	38,4 l/min	<p>VERTICAL WASTE VALVE</p>	25,8 l/min
<p>SLIM WASTE VALVE WITH HORIZONTAL OUTPUT</p>	30,0 l/min	<p>HIGH FLOW WASTE VALVE WITH HORIZONTAL OUTPUT</p>	51,0 l/min

TECHNICAL SPECIFICATIONS

- Possibility of custom cutting.
- Hydrolisis resistant. Orthophtalic polyester free.
- Resistant to thermal shock. Class 1 EN UNE-EN 14527:2006 + A1:2010.
- Safe cut. Material without silica.
- Impact resistant.
- Coloured mass.

TEST

	UNE-ENV 12633:2003 Annex A	DIN 51097:1992	French Normative XP P 05-010
CLASS 3	Slip resistance CLASS C		PN 24

- Included
- Material: AKRON (Composite in polyurethane base with mineral fillers).
- Optional
- Installation: basic, floor level or raised. Consult the installation manual included in the packaging.